

hammer electronic

handels- og ingeniørfirma - design service - pcb - cad - smd


hammer electronic
nordre strandvej 119 F.2
DK-3150 hellebaek
Denmark
Tel: +45 4921 1917
Fax: +45 4921 1918

E-mail
info @hammeredronic.dk
www.hammeredronic.com

DISPLAY MODEL HTCAKC14-16 (AKA-142)

This display is especially designed for connection to **Danfoss** controllers AKC14,15 &16 with more. The display is easily mounted from the backside of a front door etc. Without use of any tools.

Replacement for Danfoss AKA14.

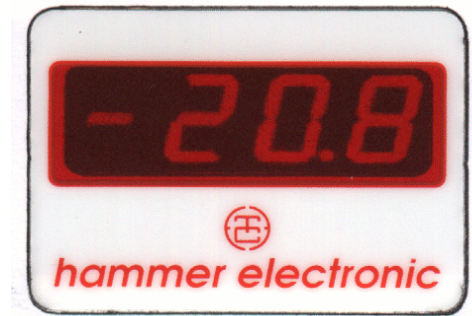

1:1

Front lens 55 x 40 mm
Panel Cut-out 52x19mm

SPECIFICATION:

Type of display	: 12,8 mm red LED
Reading distance	: approx. 8 meters
Supply voltage	: Direct from the controller.
Input signals	: Direct from the controller.
Operating temp. range	: -40°C to 85°C
Dimensions:	: Front: 55x40 mm Front lens) Instruments box: 73x52 mm Depth: 21 mm Weight: 70 g.
Cut-out dimensions	: 52x19 mm
.Degree of protection	: IP68 waterproof (embedded)

The display is supplied with 2,6 meter cable. Front cover, Front lens, stainless steel screw, washer and nut. Cable length according to customers need.



Panelmount with DANFOSS brand front lens.



Instrument box 73x52mm
Depth 21 mm